

U S B A d a p t e r




Push Pull locking



USB type B



D-shape metal housing



USB type B




USB Patch Cable



NKUSB-*

- USB 2.0 compliant - data rate up to 480 MBit/s
- Dust and water resistant sealing in combination with NAUSB-W*
- Push Pull mating design provides secure locking system if mated with NAUSB-W*
- Shielded connection - high noise immunity and EMI protection
- Ready made patch cables (1 m, 3 m and 5 m) with removable rugged diecast cable carrier
- Mates with conventional USB receptacles if cable carrier is removed

NKUSB

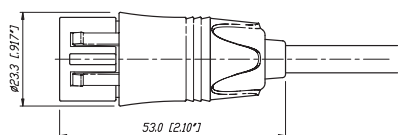


USB Receptacle



NAUSB-W

- USB 2.0 gender changer type A-B (B-A)
- Ideal for audio networking and integration of computerbased equipment into audio systems
- Lockable connection and water protection if mated with Neutrik USB cable NKUSB-*
- Optional screen to chassis grounding
- Reversible insert offering type A or B on front or rear end
- Universally accepted standard D-shape housing

NAUSB-W

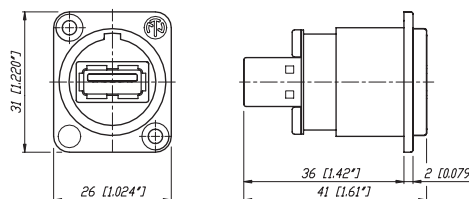

U S B A d a p t e r

Technical Data

Mechanical and Electrical

Conform with USB 2.0 Standard

Receptacle

Patch Cable

•

•

Material

Shell Zinc diecast (ZnAl4Cu1)

Shell plating Nickel or black Chrome

Insert PBTP 15% GR

Contacts Brass (CuZn39Pb3)

Contact finish Gold

•

•

•

Nickel

PBTP 15% GR

PVC

•

•

•

•

Environmental

Operating temperature -25°C to +85°C

Flammability UL94 V-0

•

•

•

•

Ordering Information

Chassis

NAUSB-W USB A – USB B Adapter (reversible), sealing ring, optional grounding, nickel housing

NAUSB-W-B USB A – USB B Adapter (reversible), sealing ring, optional grounding, black housing

Patch Cable

NKUSB-* USB 2.0 cable with overmolded flex relief and metal cable carrier, standard lengths: 1, 3, 5 m

Accessories



DSS-*



SCM



SCDX



SCDP-*

DSS-* Lettering plate for D series, colored plastic (*: 0- Black, 1- Brown, 2- Red, 3- Orange, 4- Yellow, 5- Green, 6- Blue, 7- Violet, 8- Grey, 9- White)

SCM Plastic sealing cover to protect the Firewire connectors against dust and moisture.

SCDP-* D-Size sealing gaskets, color coding (*: 0- black, 2- red, 4- yellow, 5- green, 6- blue, 9- white)

SCDX Hinged cover seals D-size chassis connectors, IP42 rated

NZP1RU-8 Panel1RU housing with 8 D-shape cutouts

NZP1RU-12 Panel1RU housing with 12 D-shape cutouts

*: 0 - Black, 1- Brown, 2 - Red, 3 - Orange, 4 - Yellow, 5 - Green, 6 - Blue, 7 - Violet, 8 - Grey, 9 - White

